



**Bexar County
Infrastructure Services
Flood Control CIP Program**

Project: MR 8


Shepherd Road at Elm Creek & Black Hill Branch

Location / Limits: Shepherd Rd between IH35 & Pearsall Rd



SCOPE :

Design and reconstruction to replace the existing low water crossings on Shepherd Rd at Black Hill Branch and Elm Creek. Improved crossings will withstand the 1% storm event. The crossing at Black Hill Branch will be constructed with multiple box culverts. The crossing at Elm Creek will be constructed as a bridge. Some channel improvements by regrading upstream and downstream will be required at both crossings.

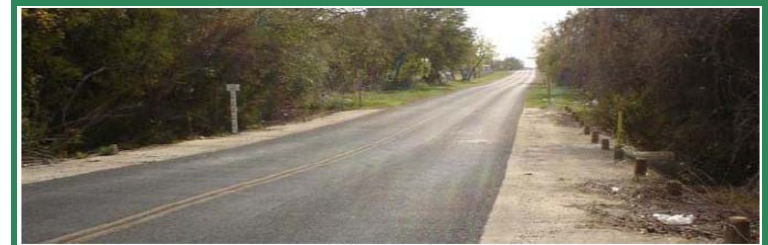

Elm Creek



Blackhill Branch

Precinct: 1 **OCL/ICL:** O.C.L.
Watershed: Medina River
Creek Name: Elm Creek
Project Type: Low Water Crossing

Consultant: Poznecki-Camarillo
Consultant Awarded: 3 /11/2008
Contractor: TBD
Contractor Awarded:
Construction Start: May 2010
Construction End: Oct 2011

Estimated Construction Cost:
 \$3,800,000

PROJECT STATUS
Final Design

